NORLUX®
Lighting Solutions

Silindir 60

CE ⏚ IP20 230V 50Hz 🏠 | A⁺⁺
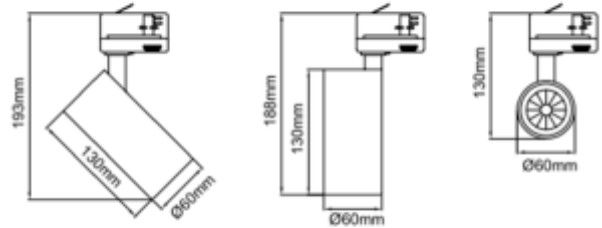
SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	15W
CCT (Color Temperature):	2700K
CRI / Ra:	90
Lumen Output:	1310lm
Lumen LED (tc=25):	1350lm
Beam Angle:	40°
Lens (Diffuser):	Clear
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	Track 3-Circuit
Mounting:	Track
Lifetime [h]:	L80B10: 50.000h
MacAdam (SDCM):	3
Color:	Black
Length [mm]:	188mm
Width [mm]:	60mm

— C0 / C180

cd / 1000 lm
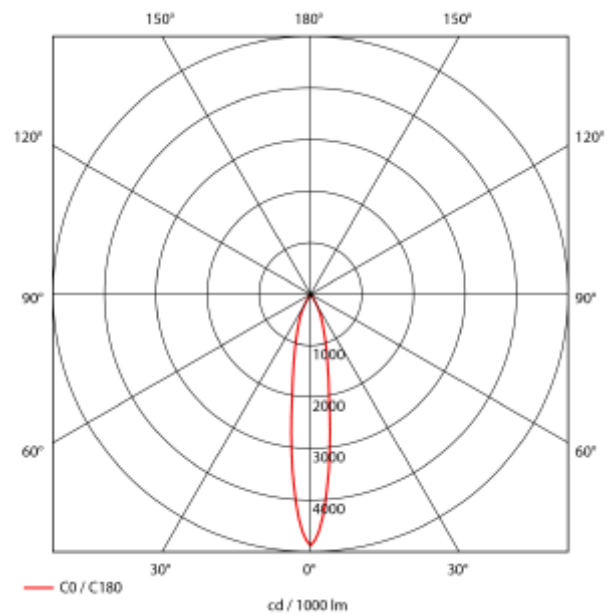
Silindir 60 is a modern and flexible spotlight with high efficiency and high CRI. The driver is bulit inside the lamp and you can tilt the spotlight 90° and rotate 350°.