

Celestial Plafond






CE 🗌 🖂	230V 50Hz	коб
--------	--------------	-----

SPECIFICATIONS

Lightsource Type:	LED (built in)	
System Power [W]:	18W	
CCT (Color Temperature):	2700-3000K	
CRI / Ra:	80	
Lumen Output:	1913lm	
Lumen LED (tc=25):	2100lm	
Beam Angle:	120°	
Lens (Diffuser):	Opal	
Dimming:	DALI, DALI2, Push	
System Voltage [V]:	230V 50Hz	
Connection:	QuickConnect	
Mounting:	Wall, Ceiling	
Lifetime [h]:	L80B10: 100 000h	
Lumen/W:	106lm/W	
MacAdam (SDCM):	3	
Color:	White	
Height [mm]:	60mm	
Width [mm]:	275mm	
Weight [kg]:	0,75kg	

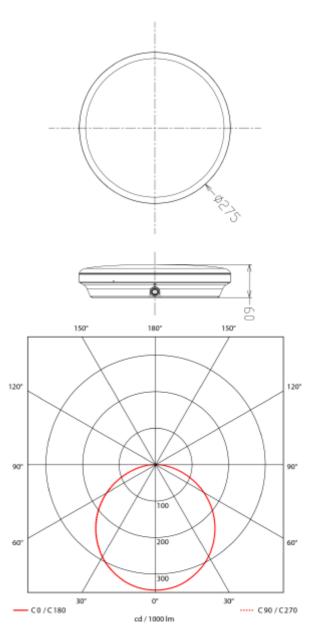

Dimmable surface mounted ceiling light with PC diffuser and even light output. IP54 waterproof structural design, its an ideal replacement for wet locations. Comes with a switch option between 2700K(default)and 3000K. Dimmable by phasecut or DALI2. QuickConnect for easy installation.