




Celestial Plafond





SPECIFICATIONS	
LED (built in)	
18W	
2700-3000K	
80	
1913lm	
2100lm	
120°	
Opal	
Phase-Cut	
230V 50Hz	
QuickConnect	
Wall, Ceiling	
L80B10: 100 000h	
106lm/W	
3	
White	
60mm	
275mm	
0,75kg	

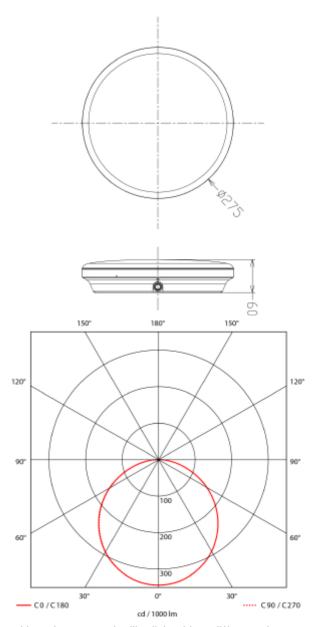

Dimmable surface mounted ceiling light with PC diffuser and even light output. IP54 waterproof structural design, its an ideal replacement for wet locations. Comes with a switch option between 2700K(default)and 3000K. Dimmable by phasecut or DALI2. QuickConnect for easy installation.