




FDV SPEC SHEET
Tania Mini Slim Surface
Art. no: 101930-36-2-p



Tania Mini Slim Surface

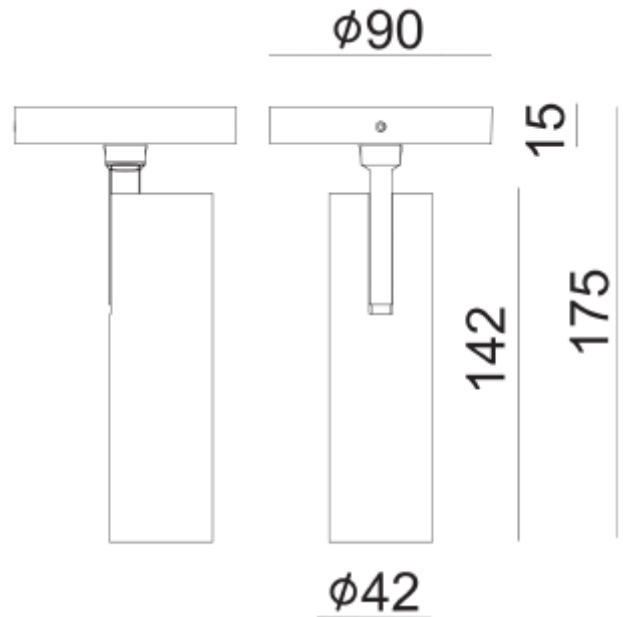

Art. no: 101930-36-2-p

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	681
Lumen LED (tc=25):	850
Beam Angle:	36°
CCT (Color Temperature):	2700
CRI / Ra:	90
Color Code:	927
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION	
Connection:	Terminal
Mounting:	Surface, Ceiling

ELECTRICAL DATA	
Dimming:	Phase-Cut
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	9
System Voltage [V]:	230V 50Hz
Dimming Phasecut Type:	Trailing edge
Protection Class:	1
Max load pr circuit - B10:	125
Max load pr circuit - B16:	200
Max load pr circuit - C10:	125
Max load pr circuit - C16:	200
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	100
Voltage Forward Min [V]:	32,3
Voltage Forward Max [V]:	38,1
Dimming Phasecut Type:	Trailing edge



FDV SPEC SHEET

Tania Mini Slim Surface

Art. no: 101930-36-2-p



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Length [mm]:	42
Height [mm]:	142
Width [mm]:	42
Diameter [mm]:	42
Weight [kg]:	0,4