NORLUX®
Lighting Solutions

Duna

CE ⏚ IP66 230V 50Hz 🏠   A⁺⁺ – A

Duna is a sealed industrial light fixture for ceiling surface mounting, indoor or outdoor under a roof. Duna may have 5x2,5mm2 PG through-wiring.
Opal PC (IK08) or PMMA (IK03) diffusor. Ask for Chemical agents list to check material resistance.
Available models can be delivered with master (sensor), slave, DALI or emergency.
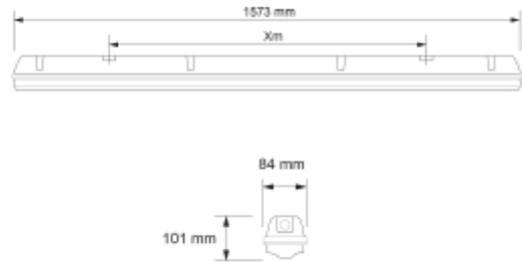
SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	47W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	5800lm
Lens (Diffuser):	PC Opal
Dimming:	DALI
System Voltage [V]:	230V 50Hz
Connection:	Terminal
Mounting:	Surface, Wall, Ceiling
Lifetime [h]:	50 000h
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	Grey
Length [mm]:	1573mm
Height [mm]:	101mm
Width [mm]:	84mm
Weight [kg]:	2,2kg