




FDV SPEC SHEET

Office Slim Up&Down

Art. no: 1078-2-ddd



Lighting Solutions

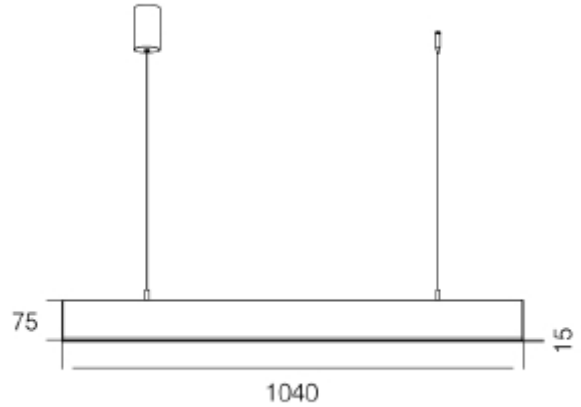

Office Slim Up&Down



Art. no: 1078-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2690
Lumen LED (tc=25):	5200
Beam Angle:	95
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	5
Lens (Diffuser):	Opal
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Terminal
-------------	----------

ELECTRICAL DATA

Dimming Output Type:	Amplitude Modulation
Standby power P _{sb} (W) <:	0,15
Flicker metric (P _{st} LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	42
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	13
Max load pr circuit - B16:	21
Max load pr circuit - C10:	21
Max load pr circuit - C16:	35
Inrush current I _{max} [A]:	35
Inrush current time [μs]:	170
Current Output [mA]:	1050
Voltage Forward Min [V]:	2,9
Voltage Forward Max [V]:	3,6



FDV SPEC SHEET

Office Slim Up&Down

Art. no: 1078-2-ddd



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1200
Height [mm]:	75
Width [mm]:	15