




## FDV SPEC SHEET

Silindir 70

Art. no: 1081-7-24-1-p



Lighting Solutions

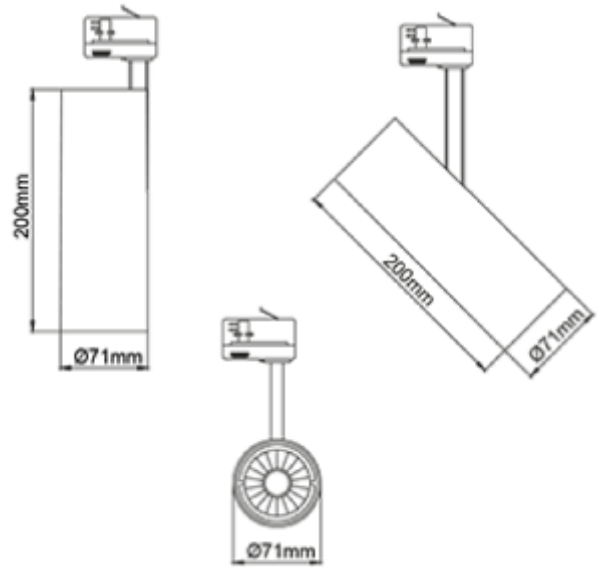

# Silindir 70



Art. no: 1081-7-24-1-p

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2300
Lumen LED (tc=25):	2500
Beam Angle:	24°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling

### ELECTRICAL DATA

Dimming:	Phase-Cut
Flicker metric (Pst LM) <:	3
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	20
System Voltage [V]:	230V 50Hz
Dimming Phasecut Type:	Leading / Trailing edge
Protection Class:	1
Max load pr circuit - B10:	27
Max load pr circuit - B16:	42
Max load pr circuit - C10:	45
Max load pr circuit - C16:	70
Leakage current [mA]:	0,1
Inrush current I <sub>max</sub> [A]:	12,3
Inrush current time [µs]:	206
Voltage Forward Min [V]:	29,3
Voltage Forward Max [V]:	38,7
Dimming Phasecut Type:	Leading / Trailing edge



## FDV SPEC SHEET

Silindir 70

Art. no: 1081-7-24-1-p



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	Grey
Length [mm]:	71
Height [mm]:	215
Width [mm]:	71
Weight [kg]:	1