



FDV SPEC SHEET


Leila

Art. no: 15072-01E-3-ddd

Ledpro
by NORLUX



 190mm

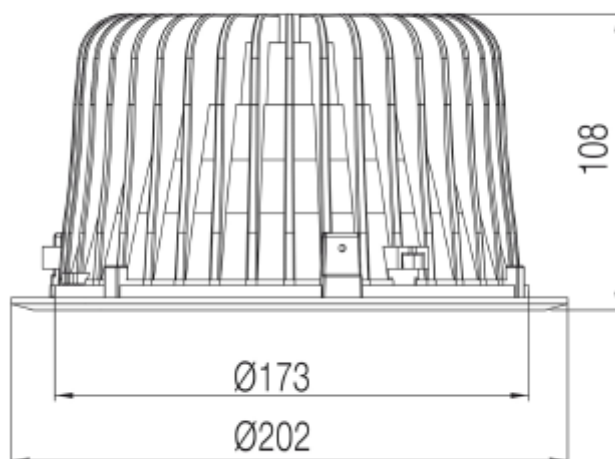

Leila



A⁺

Art. no: 15072-01E-3-ddd

LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	1877
Lumen LED (tc=25):	2365
Spredningsvinkel [°]:	70
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830
Fargetoleranse [SDCM]:	3
Optikk:	Opal



FDV SPEC SHEET

Leila

Art. no: 15072-01E-3-ddd



MONTERING / TILKOBLING

Nødllys lumen ut [lm]:	375
Tilkobling:	18i5 DALI Hurtigkobling
Utsparring [mm]:	Ø190
Montering:	Innfelt, Tak

PRODUKT

Monteres rett i isolasjon:	No
IP-grad:	IP40
Forventet Levetid :	L80B10: 100 000
Farge :	Hvit
Høyde [mm]:	102
Bredde [mm]:	205
Vekt [kg]:	1,2

ELEKTRISK DATA

UGR (<=):	22
Dimmetype:	DALI
Dimming Output Type:	Amplitude Modulation
Systemeffekt [W]:	24
Spennning [V]:	230V 50Hz
Isolasjonsklasse:	3
Belastning pr kurs - B10:	19
Belastning pr kurs - B16:	32
Belastning pr kurs - C10:	31
Belastning pr kurs - C16:	53
Lekkasjestrøm [mA]:	0,15
Startstrøm I _{max} [A]:	26
Startstrøm tid [µs]:	151
Sokkel :	N/A
Strøm LED [mA]:	600
Spennning LED Min [V]:	36
Spennning LED Max [V]:	38
Nødllys [t]:	3 timer
Nødllys testfunksjon:	Manuell
Dimming Output Type:	Amplitude Modulation