




## FDV SPEC SHEET

Cylinder 85

Art. no: 17155-7-15-2

# NORLUX®

Lighting Solutions

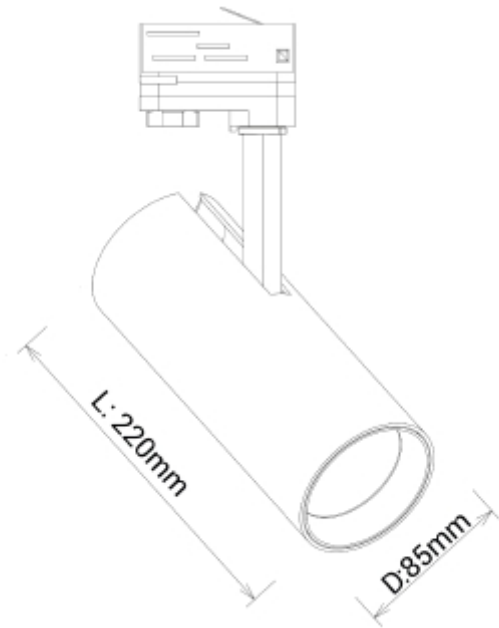

## Cylinder 85



Art. no: 17155-7-15-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	2328
Lumen LED (tc=25):	3250
Beam Angle:	15°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
Lens (Diffuser):	Clear
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling

### ELECTRICAL DATA

Dimming:	None
System Power [W]:	27
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	14
Max load pr circuit - B16:	24
Max load pr circuit - C10:	24
Max load pr circuit - C16:	40
Inrush current I <sub>max</sub> [A]:	25
Inrush current time [μs]:	150
Current Output [mA]:	700



## FDV SPEC SHEET

Cylinder 85

Art. no: 17155-7-15-2



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP20
Color:	Black
Length [mm]:	220
Height [mm]:	250
Width [mm]:	85
Weight [kg]:	1,2