



PRODUCT SHEET

Trimo


Art. no: 18045-7-30-3



Lighting Solutions


Trimo

 155mm

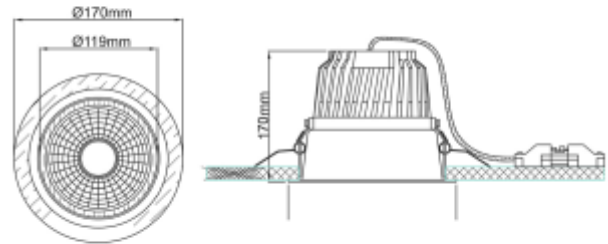

SPECIFICATIONS

| | |
|-------------------------------|-----------------------|
| Lightsource Type: | LED (built in) |
| System Power [W]: | 31W |
| CCT (Color Temperature): | 3000K |
| CRI / Ra: | 80 |
| Lumen Output: | 3820lm |
| Lumen LED (tc=25): | 4750lm |
| Beam Angle: | 30° |
| Lens (Diffuser): | Clear |
| Dimming: | None |
| System Voltage [V]: | 230V 50Hz |
| Connection: | 18i3 Quick connection |
| Mounting: | Recessed, Ceiling |
| Cut-out [mm]: | Ø155mm |
| Lifetime [h]: | L80B10: 60 000h |
| Lumen/W: | 123lm/W |
| MacAdam (SDCM): | 3 |
| Color: | White |
| Length [mm]: | 170mm |
| Height [mm]: | 170mm |
| Width [mm]: | 170mm |
| Weight [kg]: | 1,4kg |
| To be recessed in insulation: | No |

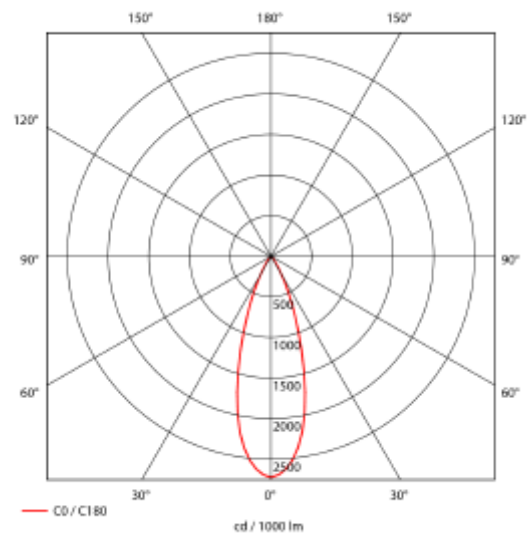

Tired of downlights giving obtrusive annoying stray light? Our Trimo range of downlights guarantees a minimum of stray light, this is accomplished by using a recessed LED light source. The Trimo range has a 18i3 connector and can be supplied with a variety of connector solutions.