




FDV SPEC SHEET

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH


Art. no: 2117-110-3



Lighting Solutions

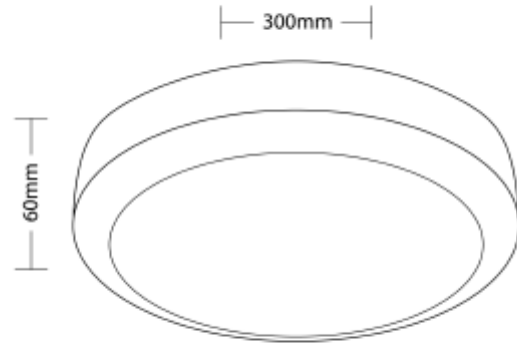

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH



Art. no: 2117-110-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1318 (3000K)
Lumen LED (tc=25):	1500
Beam Angle:	110°
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Color Code:	830/840/857
MacAdam (SDCM):	3
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Surface, Ceiling

ELECTRICAL DATA

Dimming:	None
System Power [W]:	15
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	83
Max load pr circuit - B16:	133
Max load pr circuit - C10:	83
Max load pr circuit - C16:	133
Inrush current I _{max} [A]:	25,6
Inrush current time [µs]:	20
Socket / Cap-Base:	N/A
Voltage Forward Min [V]:	25
Voltage Forward Max [V]:	42



FDV SPEC SHEET

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH
Art. no: 2117-110-3



PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B50: 50 000
Color:	White
Height [mm]:	60
Width [mm]:	300