



PRODUCT SHEET


Panel

Art. no: 2272-3



Lighting Solutions

Panel

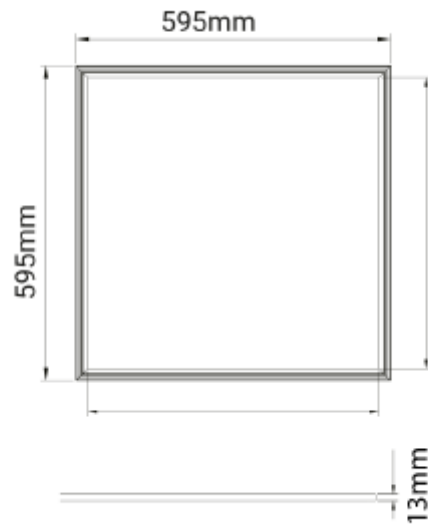

IP65 Panel suitable for interior use. It's designed and developed to suite several applications, and may be recessed, surface mounted or suspended. The Panel has 3000K an opal diffuser. IP65 protected for the front of the unit. Delivered with out driver.



SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	40W
CCT (Color Temperature):	4000K
CRI / Ra:	90
Lumen Output:	3138lm
Lumen LED (tc=25):	4800lm
Lens (Diffuser):	Opal
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	IP65 Plug
Mounting:	Recessed, Ceiling
Lifetime [h]:	L80B10: 100 000h
Color:	White
Length [mm]:	595mm
Height [mm]:	13mm
Width [mm]:	595mm