



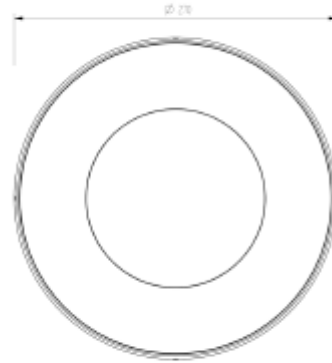

FDV SPEC SHEET

Canis 2550lm 830 110° 24W Dark Grey
Art. no: 2360-110-7



Canis 2550lm 830 110° 24W Dark Grey



Art. no: 2360-110-7

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1370
Lumen LED (tc=25):	2550
Beam Angle:	110°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Surface, Wall, Ceiling

PRODUCT

Ingress Protection:	IP54
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 50
Height [mm]:	35
Width [mm]:	270
Weight [kg]:	1,13

ELECTRICAL DATA

Dimming:	None
System Power [W]:	24
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	26
Max load pr circuit - B16:	42
Max load pr circuit - C10:	44
Max load pr circuit - C16:	71
Leakage current [mA]:	0,5
Inrush current I _{max} [A]:	10
Inrush current time [µs]:	125
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Voltage Forward Min [V]:	60
Voltage Forward Max [V]:	66