




FDV SPEC SHEET

Subra 700lm 830 110° 2x4,5W D Grey

Art. no: 2460-110-7



Lighting Solutions

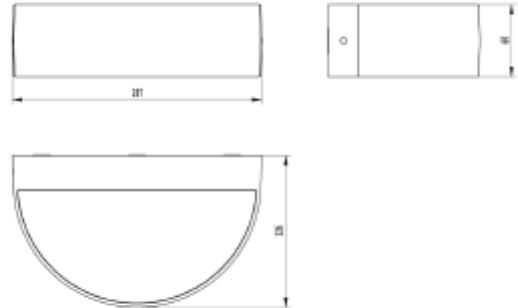

Subra 700lm 830 110° 2x4,5W D Grey



Art. no: 2460-110-7

LIGHT TECHNICAL

Lumen Output:	519
Lumen LED (tc=25):	700
Beam Angle:	110°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Opal

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Surface, Wall

ELECTRICAL DATA

Dimming:	None
System Power [W]:	2X4,5
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	26
Max load pr circuit - B16:	42
Max load pr circuit - C10:	44
Max load pr circuit - C16:	71
Leakage current [mA]:	0,5
Inrush current I _{max} [A]:	10
Inrush current time [μs]:	125
Socket / Cap-Base:	N/A
Current Output [mA]:	350
Voltage Forward Min [V]:	24
Voltage Forward Max [V]:	27



FDV SPEC SHEET

Subra 700lm 830 110° 2x4,5W D Grey

Art. no: 2460-110-7



Lighting Solutions

PRODUCT

Ingress Protection:	IP54
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 50
Color:	Dark Grey
RAL:	RAL7024
Length [mm]:	207
Height [mm]:	60
Width [mm]:	126
Weight [kg]:	0,75