



FDV SPEC SHEET


Ceto Fixed

Art. no: 28830-TW-36-3-ddd

Ledpro
by NORLUX



92mm

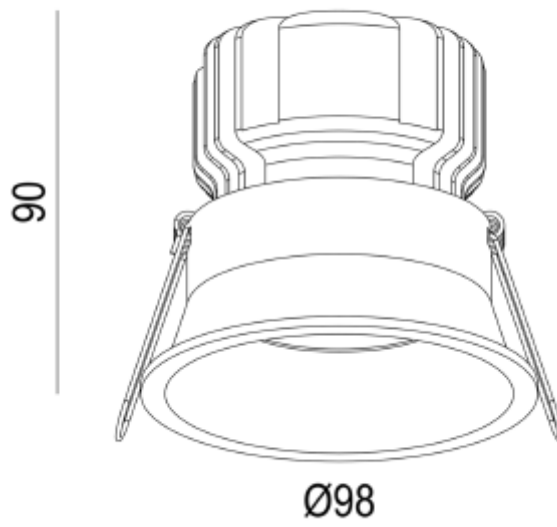

Ceto Fixed



A⁺

Art. no: 28830-TW-36-3-dd

LYS TEKNISK

Lumen LED (tc=25):	900
Spredningsvinkel [°]:	36
Fargetemperatur [K]:	2700K-6000K TW
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	827-860
Fargetoleranse [SDCM]:	3
Optikk:	Klar

MONTERING / TILKOBLING

Tilkobling:	Hurtigkobling
Utsparring [mm]:	Ø92
Montering:	Innfelt, Tak

ELEKTRISK DATA

Dimmetype:	DALI
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
Systemeffekt [W]:	15
Spenning [V]:	230V 50Hz
Isolasjonsklasse:	2
Belastning pr kurs - B10:	46
Belastning pr kurs - B16:	74
Belastning pr kurs - C10:	62
Belastning pr kurs - C16:	100
Startstrøm I _{max} [A]:	15
Startstrøm tid [µs]:	100
Sokkel :	N/A
Spenning LED Min [V]:	32,4
Spenning LED Max [V]:	36



FDV SPEC SHEET

Ceto Fixed

Art. no: 28830-TW-36-3-ddd



PRODUKT

Monteres rett i isolasjon:	No
IP-grad:	IP44
Vandal klasse:	IK02
Driftstemperatur [°C]:	-20 - 45
Forventet Levetid :	L80B50: 100 000
Farge :	Hvit
Høyde [mm]:	90
Diameter [mm]:	98
Vekt [kg]:	0,25