





FDV SPEC SHEET

Benu Office DALI

Art. no: 3730-110-2-ddd



Lighting Solutions

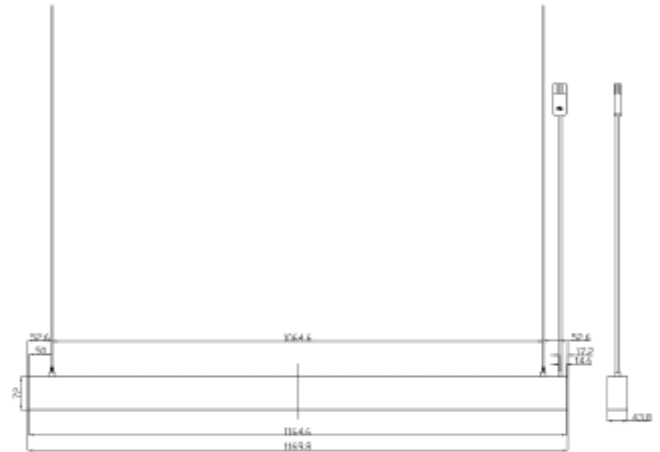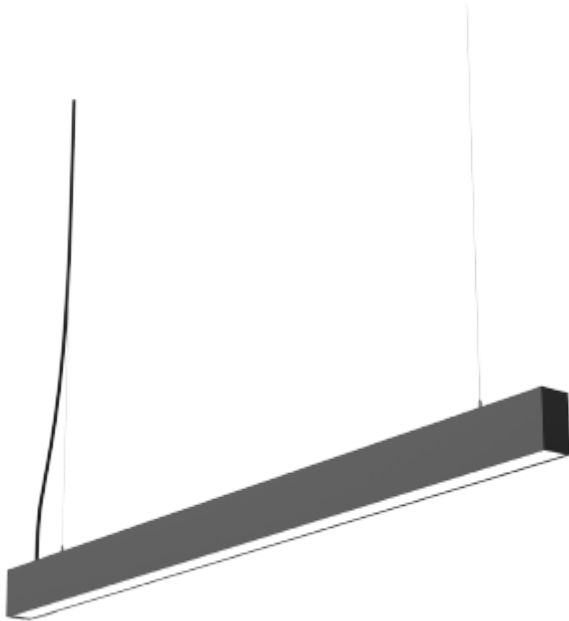

Benu Office DALI



Art. no: 3730-110-2-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	6520
Lumen LED (tc=25):	7200
Beam Angle:	110° / 75°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Prismatic
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	18i5 Quick connection
Mounting:	Suspended, Ceiling, Pendant

ELECTRICAL DATA

Dimming:	DALI2
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	8
Max load pr circuit - B16:	32
Max load pr circuit - C10:	12
Max load pr circuit - C16:	37
Leakage current [mA]:	0,75
Inrush current Imax [A]:	30
Inrush current time [µs]:	110
Socket / Cap-Base:	N/A
Current Output [mA]:	1250
Voltage Forward Min [V]:	33
Voltage Forward Max [V]:	36



FDV SPEC SHEET

Benu Office DALI

Art. no: 3730-110-2-ddd



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK02
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	1170
Height [mm]:	76
Width [mm]:	43,8
Weight [kg]:	2,5