




FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-3



Lighting Solutions

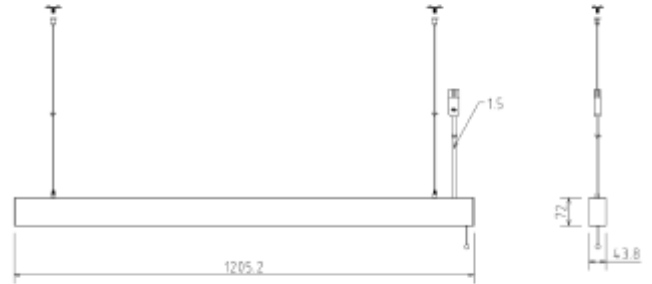

Benu Office Pullswitch



Art. no: 3733-110-3

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen LED (tc=25): | 7000 |
| Beam Angle: | 110° /75° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 90 |
| Color Code: | 940 |
| Lens (Diffuser): | Micropris. |

MOUNTING / CONNECTION

| | |
|-------------|-----------------------------|
| Connection: | 18i3 Quick connection |
| Mounting: | Suspended, Ceiling, Pendant |

ELECTRICAL DATA

| | |
|-------------------------------------|----------------------|
| Dimming: | Pull Dim |
| Dimming Output Type: | Amplitude Modulation |
| Flickerfree: | Yes |
| Flicker metric (Pst LM) <: | 0,002 |
| Stroboscopic effect metric (SVM) <: | 0,003 |
| System Power [W]: | 50 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 28 |
| Max load pr circuit - B16: | 45 |
| Max load pr circuit - C10: | 28 |
| Max load pr circuit - C16: | 45 |
| Leakage current [mA]: | 0,7 |
| Inrush current Imax [A]: | 4,75 |
| Inrush current time [µs]: | 162 |
| Socket / Cap-Base: | N/A |



FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-3



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| Length [mm]: | 1205 |
| Height [mm]: | 76 |
| Width [mm]: | 43,8 |
| Weight [kg]: | 2,5 |