




FDV SPEC SHEET

Izar

Art. no: 3931-01-3-ddd



Lighting Solutions

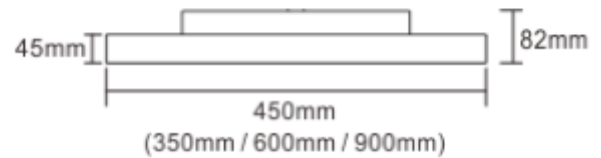

Izar



Art. no: 3931-01-3-ddd

LIGHT TECHNICAL

Lumen Output:	3300
Lumen LED (tc=25):	3600
Beam Angle:	90° / 110°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal
UGR (<=):	18

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Surface, Ceiling, Pendant

ELECTRICAL DATA

Dimming:	DALI
System Power [W]:	30
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	15
Max load pr circuit - B16:	24
Max load pr circuit - C10:	19
Max load pr circuit - C16:	30
Leakage current [mA]:	0,7
Inrush current I _{max} [A]:	30
Inrush current time [µs]:	120
Socket / Cap-Base:	N/A



FDV SPEC SHEET

Izar

Art. no: 3931-01-3-ddd



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK06
Lifetime [h]:	L80B10: 50.000
Color:	White
Height [mm]:	82
Width [mm]:	450
Weight [kg]:	4,15