



## PRODUCT SHEET


Cylinder 60

Art. no: 60327-7-02-38-2

# NORLUX®


Lighting Solutions

## Cylinder 60

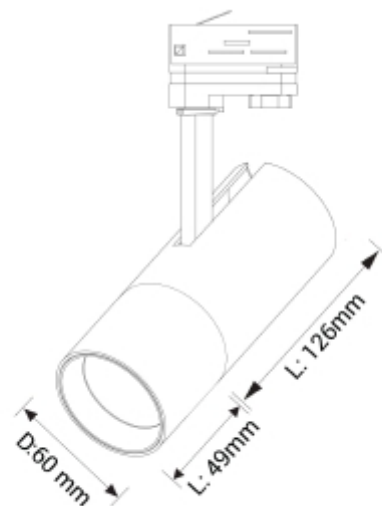

### SPECIFICATIONS

|                          |                  |
|--------------------------|------------------|
| Lightsource Type:        | LED (built in)   |
| System Power [W]:        | 14W              |
| CCT (Color Temperature): | 2700K            |
| CRI / Ra:                | 90               |
| Lumen LED (tc=25):       | 1550lm           |
| Beam Angle:              | 38° (15° & 25°)  |
| Lens (Diffuser):         | Clear            |
| Dimming:                 | Phase-Cut        |
| System Voltage [V]:      | 230V 50Hz        |
| Connection:              | Track 3-Circuit  |
| Mounting:                | Track, Ceiling   |
| Lifetime [h]:            | L80B10: 100 000h |
| Color:                   | Black            |
| Height [mm]:             | 220mm            |
| Width [mm]:              | 60mm             |
| Weight [kg]:             | 0,6kg            |

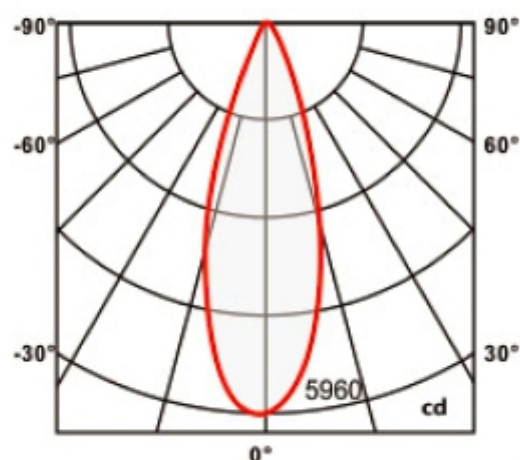

The Cylinder 60 has the LED driver included in the lamp head for use in 3-circuit tracks. It can be tilted 90 degrees and rotated 350 degrees on its own axis and comes with a variety of accessories. Delivered with 2700K, CRI90 and are phasecut dimmable.

Choose between 15°, 25° and 38° lens, which are all included. 38° are standard lens on luminaire.