




FDV SPEC SHEET

Anka

Art. no: 6705-04-1

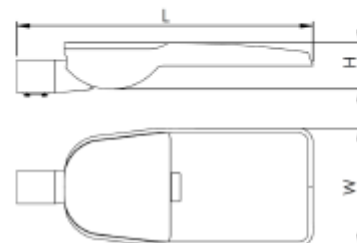

L, mm	W, mm	H, mm
525	250	102
625	288	102
776	320	102

Anka



Art. no: 6705-04-1

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	11400
Lumen LED (tc=25):	12000
Beam Angle:	R4 Assymetric
CCT (Color Temperature):	4000
CRI / Ra:	70
Color Code:	740
MacAdam (SDCM):	3

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Wall, Mast

ELECTRICAL DATA

Dimming:	None
Dimming Output Type:	Amplitude Modulation
System Power [W]:	91
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	6
Max load pr circuit - B16:	10
Max load pr circuit - C10:	10
Max load pr circuit - C16:	17
Leakage current [mA]:	0,45
Inrush current I _{max} [A]:	41,6
Inrush current time [µs]:	238
Socket / Cap-Base:	N/A



FDV SPEC SHEET

Anka

Art. no: 6705-04-1



Lighting Solutions

PRODUCT

Ingress Protection:	IP66
Impact Protection:	IK09
Corrosion Class:	C3
Wind force (EPA) [m2]:	0,18
Operating Temperature [°C]:	-25 - 40
Lifetime [h]:	L90B10: 100 000
Color:	Grey
RAL:	RAL7022
Length [mm]:	625
Height [mm]:	102
Width [mm]:	288
Weight [kg]:	7,3