




FDV SPEC SHEET

Hali


Art. no: 6996-01-2



Lighting Solutions

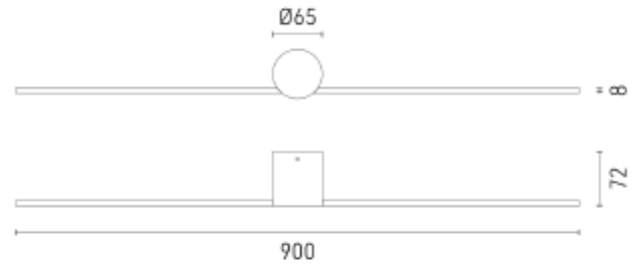

Hali



Art. no: 6996-01-2

LIGHT TECHNICAL

Lumen Output:	460
Lumen LED (tc=25):	980
Beam Angle:	120
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Opal
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	QuickConnect
Mounting:	Surface

ELECTRICAL DATA

Dimming:	Phase-Cut
System Power [W]:	10
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	35
Max load pr circuit - B16:	56
Max load pr circuit - C10:	74
Max load pr circuit - C16:	118
Leakage current [mA]:	5
Inrush current I _{max} [A]:	5
Inrush current time [µs]:	300
Socket / Cap-Base:	N/A
Current Output [mA]:	300



FDV SPEC SHEET

Hali

Art. no: 6996-01-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP44
Impact Protection:	IK02
Lifetime [h]:	L80B50: 50 000
Color:	Black
Length [mm]:	900
Height [mm]:	8
Width [mm]:	65
Weight [kg]:	0,37