




## FDV SPEC SHEET

Antlia C  
Art. no: 735-40-3

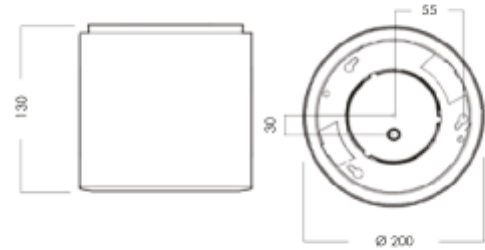

# Antlia C



Art. no: 735-40-3

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	1858
Beam Angle:	40°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
Lens (Diffuser):	Opal

### MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Surface, Ceiling

### ELECTRICAL DATA

Dimming:	None
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	16
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	38
Max load pr circuit - B16:	60
Max load pr circuit - C10:	57
Max load pr circuit - C16:	91
Inrush current I <sub>max</sub> [A]:	4
Inrush current time [µs]:	50
Socket / Cap-Base:	N/A
Current Output [mA]:	500



## FDV SPEC SHEET

Antlia C

Art. no: 735-40-3



*Lighting Solutions*

### PRODUCT

To be recessed in insulation:	Not applicable
Ingress Protection:	IP44
Impact Protection:	IK04
Operating Temperature [°C]:	0 - 35
Lifetime [h]:	L80B50: 75 000
Color:	White
Height [mm]:	130
Width [mm]:	200
Weight [kg]:	1,35