



PRODUCT SHEET


Pavo P

Art. no: 8017646



Lighting Solutions

Pavo P

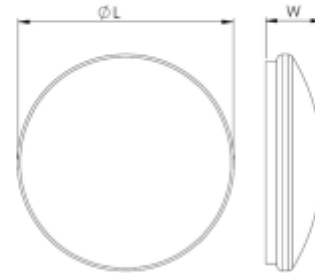

L, mm	W, mm	A, mm	B, mm	C, mm
280	95	135	87	77.5
360	105	196	104	123
410	115	239	157	149.5
500	140	317	191.5	124.5



SPECIFICATIONS

Lightsource Type: LED (built in)

System Power [W]: 22W

CCT (Color Temperature): 3000K

CRI / Ra: 80

Lumen Output: 2090lm

Lumen LED (tc=25): 2090lm

Beam Angle: 118

Lens (Diffuser): Opal

Dimming: None

System Voltage [V]: 230V 50Hz

Connection: Terminal

Mounting: Surface, Wall, Ceiling

Lifetime [h]: L70B50: 40 000h

Lumen/W: 95lm/W

UGR (<=): 22

MacAdam (SDCM): 5

Color: White

Length [mm]: 410mm


Height [mm]: 115mm

Width [mm]: 410mm

Weight [kg]: 0,9kg

Emergency light [h]: 3 hours

Emergency light testing: Selftest

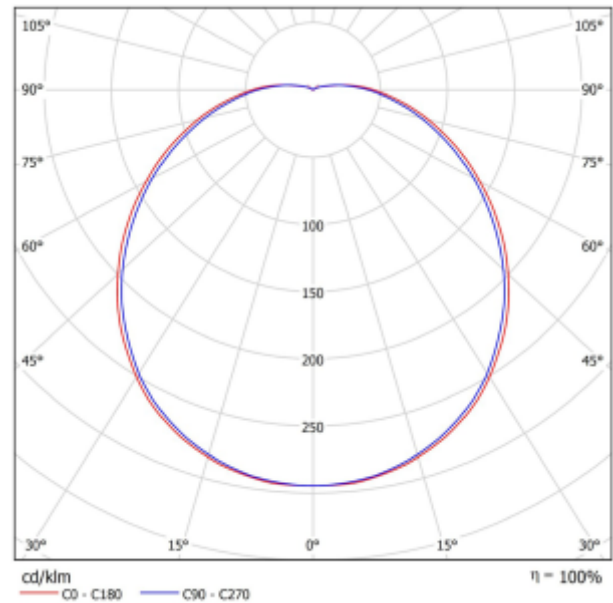

Surface mounted LED plafond with direct light distribution. Opal PMMA diffuser and steel housing. UGR index: =22. IP44. IK02. 3 hours emergency with Selftest.