





## FDV SPEC SHEET

Ledline


Art. no: 805004-2-ddd



Lighting Solutions

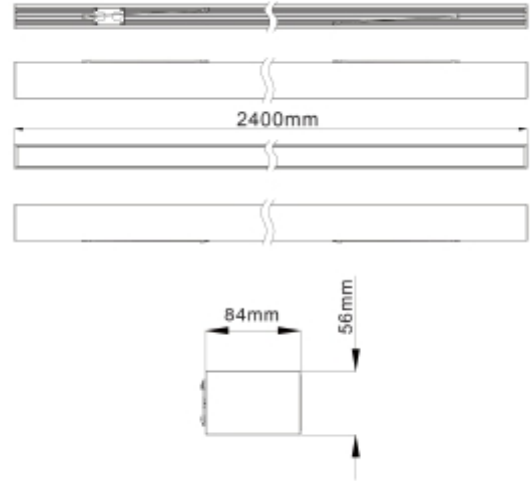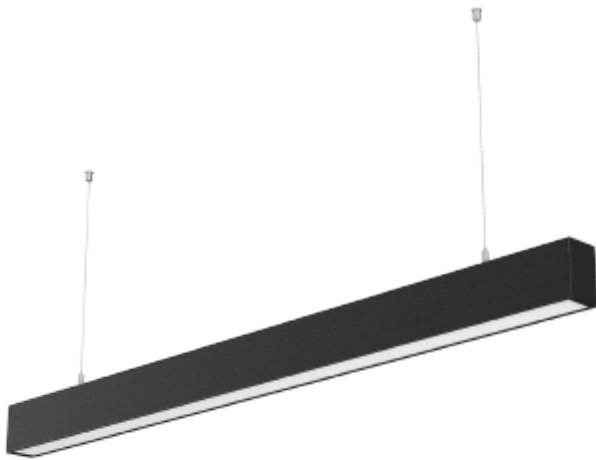

## Ledline



Art. no: 805004-2-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	5950
Lumen LED (tc=25):	7100
Beam Angle:	110
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Opal

### MOUNTING / CONNECTION

Connection:	LEDLine 5-pin
Mounting:	Recessed, Surface, Ceiling, Pendan

### ELECTRICAL DATA

Dimming:	DALI
System Power [W]:	75
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	9
Max load pr circuit - B16:	14
Max load pr circuit - C10:	10
Max load pr circuit - C16:	17
Leakage current [mA]:	0,25
Inrush current I <sub>max</sub> [A]:	60
Inrush current time [μs]:	3,5
Socket / Cap-Base:	N/A
Current Output [mA]:	840
Voltage Forward Min [V]:	32
Voltage Forward Max [V]:	48



## FDV SPEC SHEET

Ledline

Art. no: 805004-2-ddd



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK08
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	2400
Height [mm]:	84
Width [mm]:	56
Weight [kg]:	6,6