NORLUX®
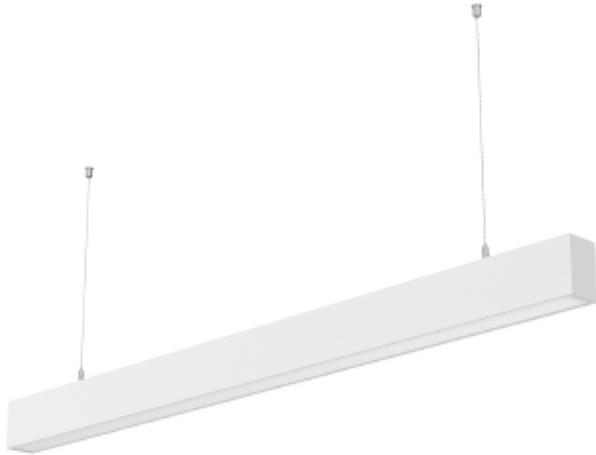*Lighting Solutions*

Ledline

LEDline is a modern linear LED system for seamless lighting. It is based on modular chassis details allowing for seamless extensions through both straight connectors, 90 degrees corners and X-crosses. This allows light designers to make tailor fit lighting systems in an easy manner. The chassis details assure easy installation without failures. Add 1 pc 8050-05 for each mains supply (each row or standalone). Also add mounting accessories.

CE | IP40 | 230V 50Hz | IK08

A++ - A

SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	75W
CCT (Color Temperature):	4000K
CRI / Ra:	80
Lumen Output:	9000lm
Lumen LED (tc=25):	9200lm
Beam Angle:	110
Lens (Diffuser):	Opal
Dimming:	None
System Voltage [V]:	230V 50Hz
Connection:	LEDLine 5-pin
Mounting:	Recessed, Surface, Ceiling, Pendant
Lifetime [h]:	L80B10: 100 000h
Color:	Grey
Length [mm]:	2400mm
Height [mm]:	84mm
Width [mm]:	56mm
Weight [kg]:	6,6kg