



FDV SPEC SHEET


Trunk

Art. no: CFL-1550-E-30WD-08-3



Lighting Solutions

Unit: mm

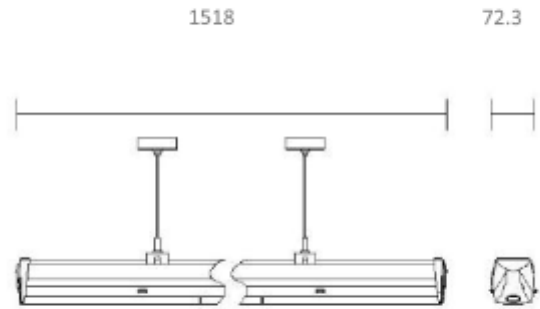

Trunk



Art. no: CFL-1550-E-30WD-0

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7629
Lumen LED (tc=25):	7800
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Trunk 8-wires
Mounting:	Suspended, Ceiling

PRODUCT

Ingress Protection:	IP20
Lifetime [h]:	L80B10: 100 000
Color:	White
Length [mm]:	1500
Height [mm]:	78,6
Width [mm]:	72,3
Weight [kg]:	1,64

ELECTRICAL DATA

Dimming:	None
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	11
Max load pr circuit - B16:	18
Max load pr circuit - C10:	18
Max load pr circuit - C16:	30
Leakage current [mA]:	0,45
Inrush current I _{max} [A]:	28
Inrush current time [μs]:	280
Emergency light [h]:	3 hours
Emergency light testing:	Manual
Emergency lumen out [lm]:	960