




**FDV SPEC SHEET**  
Z line  
Art. no: 102086-00-1-ddd



## Z line

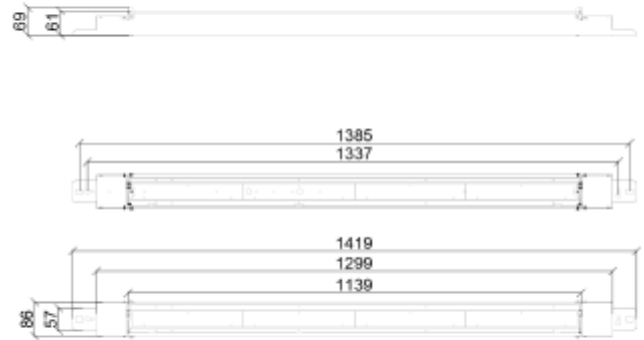

Art. no: 102086-00-1-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	7630
Lumen LED (tc=25):	8000
Beam Angle:	70°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3
Lens (Diffuser):	Lens

### ELECTRICAL DATA

Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
Flickerfree:	Yes
Standby power Psb (W) <:	0,25
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	42
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	15
Max load pr circuit - B16:	24
Max load pr circuit - C10:	25
Max load pr circuit - C16:	40
Leakage current [mA]:	0,5
Inrush current Imax [A]:	25
Inrush current time [µs]:	300
Current Output [mA]:	350



## FDV SPEC SHEET

Z line

Art. no: 102086-00-1-ddd



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP23
Impact Protection:	IK02
Operating Temperature [°C]:	0 - 40
Lifetime [h]:	L80B10: 100 000
Color:	Steel
Length [mm]:	1420
Height [mm]:	69
Width [mm]:	86
Weight [kg]:	3,35
Housing Material :	Steel

### MOUNTING / CONNECTION

Connection:	QuickConnect
Through-wiring (mm2):	5x2,5
Mounting:	Surface, Ceiling