




FDV SPEC SHEET

Stream Y

Art. no: 102452-E-02



Lighting Solutions

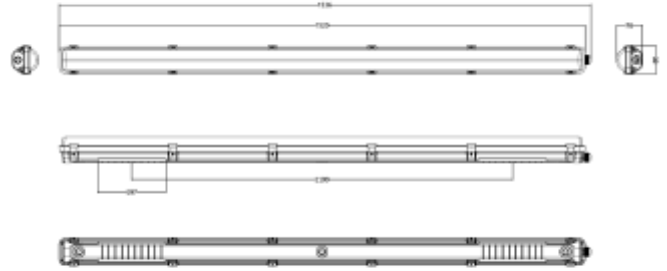

Stream Y



Art. no: 102452-E-02

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	6600
Lumen LED (tc=25):	7200
Beam Angle:	120°
CCT (Color Temperature):	4000
CRI / Ra:	80
Color Code:	840
MacAdam (SDCM):	3
Lens (Diffuser):	PC Opal

ELECTRICAL DATA	
Dimming:	None
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	42
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B16:	36
Inrush current I _{max} [A]:	25
Inrush current time [µs]:	135
Socket / Cap-Base:	N/A
Current Output [mA]:	300
Emergency light [h]:	3 hours
Emergency light testing:	Selftest
Emergency lumen out [lm]:	270

MOUNTING / CONNECTION	
Connection:	Terminalx2
Through-wiring (mm2):	5x2,5
Mounting:	Surface, Suspended



FDV SPEC SHEET

Stream Y

Art. no: 102452-E-02



Lighting Solutions

PRODUCT

Ingress Protection:	IP65
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	Grey
Length [mm]:	1536
Height [mm]:	80
Width [mm]:	76
Housing Material :	Polycarbonate