




FDV SPEC SHEET

C Line Base

Art. no: 102516-2-01-1



Lighting Solutions

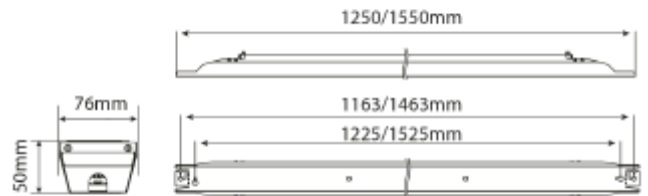

C Line Base



Art. no: 102516-2-01-1

LIGHT TECHNICAL

| | |
|--------------------------|-------------------|
| Lightsource Type: | LED (replaceable) |
| Lumen Output: | 10793 |
| Lumen LED (tc=25): | 12100 |
| Beam Angle: | 90° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

PRODUCT

| | |
|---------------------|--------------|
| Ingress Protection: | IP23 |
| Impact Protection: | IK08 |
| Lifetime [h]: | L80: 100 000 |
| Color: | Steel |
| Length [mm]: | 1250 |
| Height [mm]: | 50 |
| Width [mm]: | 76 |
| Weight [kg]: | 2,04 |

ELECTRICAL DATA

| | |
|--------------------------------------|-------------|
| Dimming: | None |
| Flickerfree: | Yes |
| Flicker metric (Pst LM) <: | 0,028 |
| Stroboscopic effect metric (SVM) <: | 0,004 |
| System Power [W]: | 60/50/42/33 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 11 |
| Max load pr circuit - B16: | 18 |
| Max load pr circuit - C10: | 18 |
| Max load pr circuit - C16: | 29 |
| Inrush current I _{max} [A]: | 23 |
| Inrush current time [µs]: | 242 |
| Current Output [mA]: | 70 |

MOUNTING / CONNECTION

| | |
|-------------|------------------|
| Connection: | Quickconnectx2 |
| Mounting: | Surface, Ceiling |