



PRODUCT SHEET


Iota G2

Art. no: 102673-02-2

NORLUX®

Lighting Solutions

Iota G2

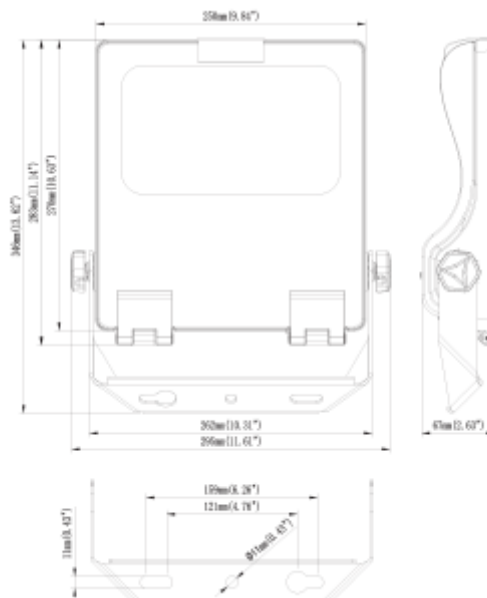

SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	100/75/50/30W
CCT (Color Temperature):	4000K
CRI / Ra:	70
Lumen Output:	14000lm
Lumen LED (tc=25):	15000lm
Beam Angle:	55x125
Lens (Diffuser):	Lens
Dimming:	None
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Cable 1.5m
Mounting:	Wall
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	138lm/W
MacAdam (SDCM):	5
Color:	Black
Length [mm]:	346mm
Height [mm]:	295mm
Width [mm]:	67mm
Weight [kg]:	3,7kg

Iota G2 is a highly cost-effective floodlight that comes with a power switch in various sizes, equipped with front clips for easy access to the dip switch. It is equipped with asymmetric optics that make it ideal for a variety of applications. For post mounting, a mounting bracket can be purchased separately. With a solid IP rating of IP66, it is perfect for outdoor use in various environments.