



PRODUCT SHEET

Ceto R

Art. no: 102791-36-3


NORLUX®

Lighting Solutions

Ceto R




Ø 160-170mm

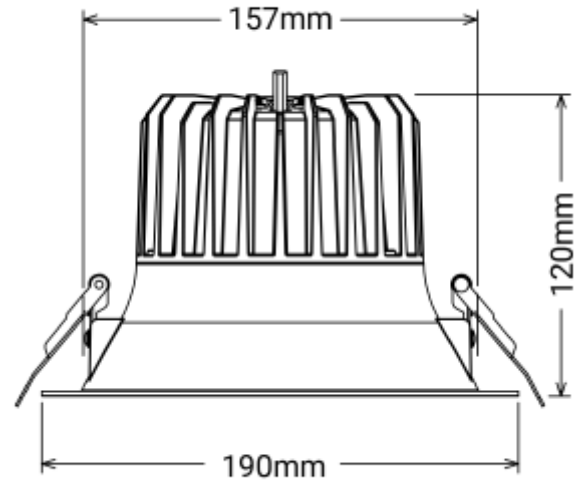

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	18W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	1900lm
Lumen LED (tc=25):	2100lm
Beam Angle:	36°
Lens (Diffuser):	Clear
Dimming:	Phase-Cut
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	18i3 Quick connection
Mounting:	Recessed
Cut-out [mm]:	160-175mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	105lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Color:	White
Length [mm]:	190mm
Height [mm]:	120mm
Width [mm]:	190mm
Diameter [mm]:	190mm
Weight [kg]:	0,7kg
Emergency light [h]:	No Emergency light
Emergency light testing:	N/A
To be recessed in insulation:	Not applicable

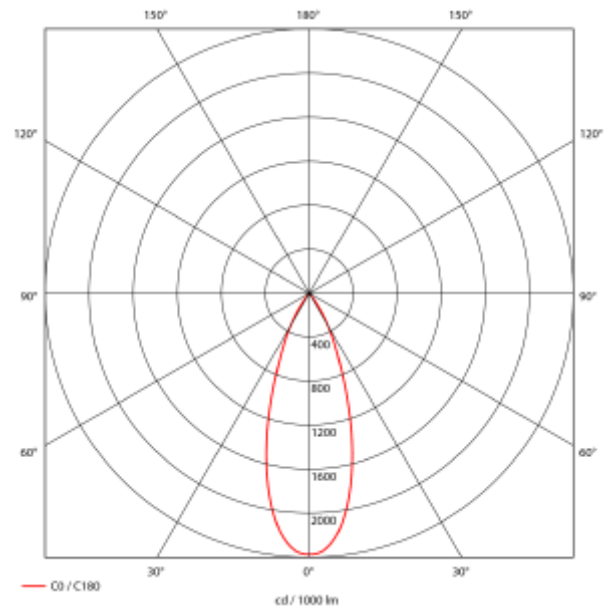

Ceto R is an elegant retrofit lighting product, ideal for use in corridors, offices, stores, and hotels to create a pleasant atmosphere. With an impressive CRI, CCT, and lumens per watt, Ceto R provides high-quality lighting that meets various needs. The product has an optimal size, with a cutout diameter of Ø160-175mm, making it perfect for replacing older retrofit lighting.