




FDV SPEC SHEET

Colonel

Art. no: 3911-03-2

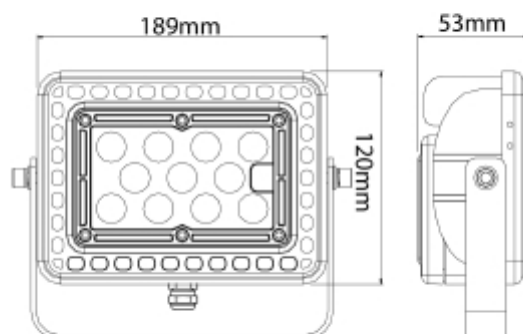

Colonel



A⁺

Art. no: 3911-03-2

LIGHT TECHNICAL

| | |
|--------------------------|---------|
| Lumen Output: | 3756 |
| Lumen LED (tc=25): | 4700 |
| Beam Angle: | 110x90° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|-------------------------------|
| Connection: | Cable 0.5m |
| Mounting: | Surface, Wall, Ceiling, Floor |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | 1-10V |
| System Power [W]: | 29 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 7 |
| Max load pr circuit - B16: | 11 |
| Max load pr circuit - C10: | 8 |
| Max load pr circuit - C16: | 13 |
| Leakage current [mA]: | 1 |
| Inrush current I _{max} [A]: | 50 |
| Inrush current time [μs]: | 5 |
| Socket / Cap-Base: | N/A |



FDV SPEC SHEET

Colonel

Art. no: 3911-03-2



PRODUCT

| | |
|-----------------------------|----------------|
| Ingress Protection: | IP66 |
| Impact Protection: | IK10 |
| Operating Temperature [°C]: | -40 - 55 |
| Lifetime [h]: | L80B50: 50 000 |
| Color: | Black/Brown |
| Length [mm]: | 189 |
| Height [mm]: | 120 |
| Width [mm]: | 53 |
| Weight [kg]: | 1,2 |