




FDV SPEC SHEET

Halo Pendant Dimbar

Art. no: 1127-2-120-2

Ledpro
by NORLUX

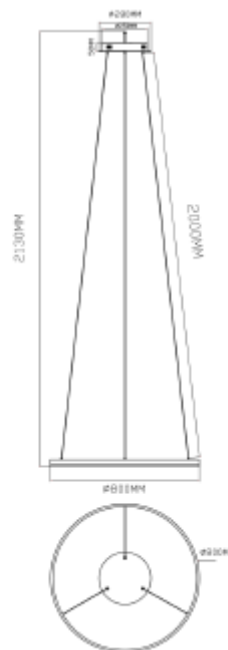

Halo Pendant Dimbar



Art. no: 1127-2-120-2

LYS TEKNISK

Lyskilde:	LED (innebygget)
Lumen ut (lm):	1400
Lumen LED (tc=25):	3200
Spredningsvinkel [°]:	120
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830
Fargetoleranse [SDCM]:	6
Optikk:	Frosted
UGR (<=):	16

MONTERING / TILKOBLING

Tilkobling:	18i3 Hurtigkobling
Montering:	Tak, Pendel

ELEKTRISK DATA

Dimmetype:	Faseavsnitt
Dimming Output Type:	Amplitude Modulation
Dimming Phasecut Type:	Leading / Trailing edge
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
Systemeffekt [W]:	28
Spenning [V]:	230V 50Hz
Isolasjonsklasse:	2
Maks belastning pr kurs - B10:	52
Maks belastning pr kurs - B16:	84
Maks belastning pr kurs - C10:	52
Maks belastning pr kurs - C16:	84
Lekkasjestrøm [mA]:	7
Startstrøm I _{max} [A]:	5
Startstrøm tid [µs]:	100
Spenning LED Min [V]:	2,6
Spenning LED Max [V]:	3,4



FDV SPEC SHEET

Halo Pendant Dimbar

Art. no: 1127-2-120-2



PRODUKT

IP-grad:	IP20
Driftstemperatur [°C]:	-20 - 45
Forventet Levetid :	L80B10: 50 000
Farge :	Sort
Lengde [mm]:	800
Høyde [mm]:	34
Bredde [mm]:	800
Vekt [kg]:	3