




FDV SPEC SHEET

Heka 1050lm 830 30° 15W Brushed Steel Phasecut
Art. no: 2560-30-1

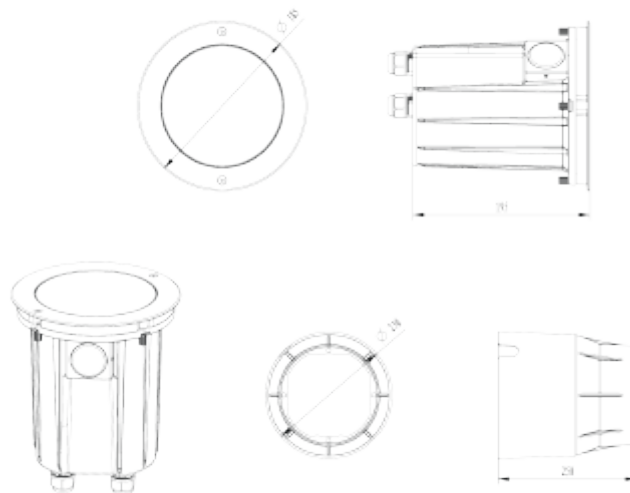

Heka 1050lm 830 30° 15W Brushed Steel Phasecut



Art. no: 2560-30-1

LIGHT TECHNICAL

| | |
|--------------------------|-------|
| Lumen LED (tc=25): | 1050 |
| Beam Angle: | 30° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-------------|------------------|
| Connection: | Cable 2m |
| Mounting: | Recessed, Ground |

PRODUCT

| | |
|-----------------------------|---------------|
| Ingress Protection: | IP67 |
| Impact Protection: | IK10 |
| Operating Temperature [°C]: | -20 - 50 |
| Color: | Brushed Steel |
| Height [mm]: | 250 |
| Width [mm]: | 230 |
| Weight [kg]: | 3,5 |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | Phase-Cut |
| System Power [W]: | 15 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 49 |
| Max load pr circuit - B16: | 80 |
| Max load pr circuit - C10: | 80 |
| Max load pr circuit - C16: | 135 |
| Leakage current [mA]: | 5 |
| Inrush current I _{max} [A]: | 80 |
| Inrush current time [μs]: | 350 |
| Socket / Cap-Base: | N/A |