




**FDV SPEC SHEET**  
Galactic C  
Art. no: 9067-2-02-2-ddd



# Galactic C

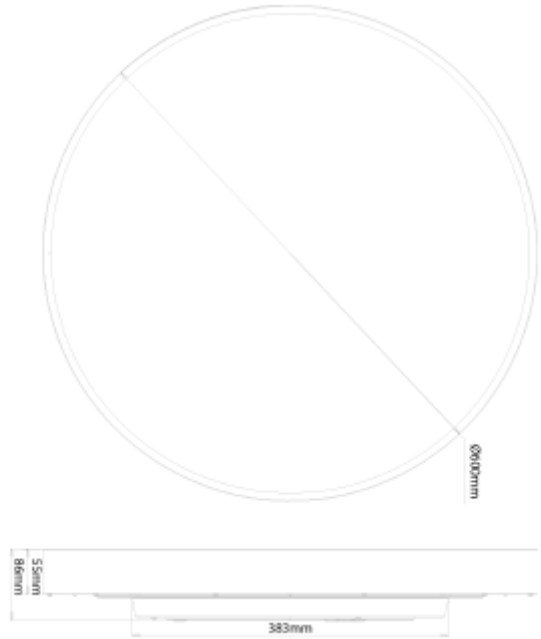

Art. no: 9067-2-02-2-ddd

## LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	5900
Lumen LED (tc=25):	6400
Beam Angle:	120°
CCT (Color Temperature):	2700-3000K
CRI / Ra:	80
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.

## MOUNTING / CONNECTION

Connection:	QuickConnect
Cut-out [mm]:	Ø385-Ø415
Mounting:	Partial-recessed, Surface, Pendant

## ELECTRICAL DATA

Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
System Power [W]:	60
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	6
Max load pr circuit - B16:	10
Max load pr circuit - C10:	10
Max load pr circuit - C16:	16
Leakage current [mA]:	0,46
Inrush current I <sub>max</sub> [A]:	33
Inrush current time [µs]:	280
Socket / Cap-Base:	N/A
Current Output [mA]:	500



## FDV SPEC SHEET

Galactic C

Art. no: 9067-2-02-2-ddd



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP40
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Height [mm]:	86
Width [mm]:	600
Weight [kg]:	6,9
Housing Material :	Aluminium