




FDV SPEC SHEET
Galactic C
Art. no: 9067-2-02-3-ddd



Galactic C

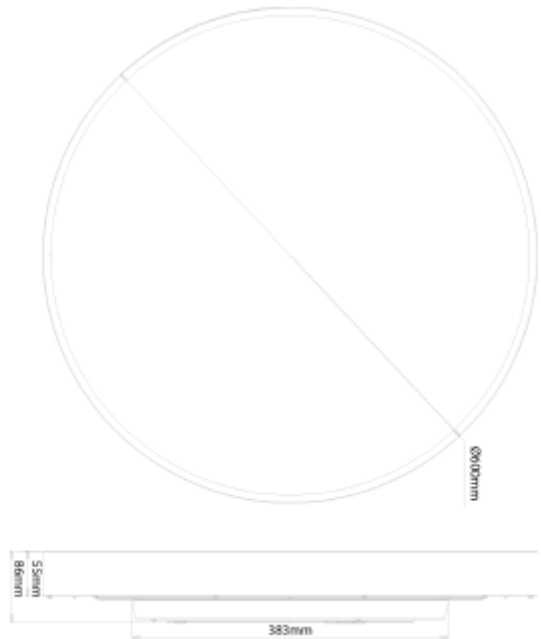

Art. no: 9067-2-02-3-ddd

LIGHT TECHNICAL	
Lightsource Type:	LED (built in)
Lumen Output:	5900
Lumen LED (tc=25):	6400
Beam Angle:	120°
CCT (Color Temperature):	2700-3000K
CRI / Ra:	80
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.

ELECTRICAL DATA	
Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
System Power [W]:	60
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	6
Max load pr circuit - B16:	10
Max load pr circuit - C10:	10
Max load pr circuit - C16:	16
Leakage current [mA]:	0,46
Inrush current I _{max} [A]:	33
Inrush current time [µs]:	280
Socket / Cap-Base:	N/A
Current Output [mA]:	500

MOUNTING / CONNECTION	
Connection:	QuickConnect
Cut-out [mm]:	Ø385-Ø415
Mounting:	Partial-recessed, Surface, Pendant



FDV SPEC SHEET

Galactic C

Art. no: 9067-2-02-3-ddd



Lighting Solutions

PRODUCT

Ingress Protection:	IP40
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9016
Height [mm]:	86
Width [mm]:	600
Weight [kg]:	6,9
Housing Material :	Aluminium