




FDV SPEC SHEET

Galactic C

Art. no: 9077-02-3-ddd



Lighting Solutions

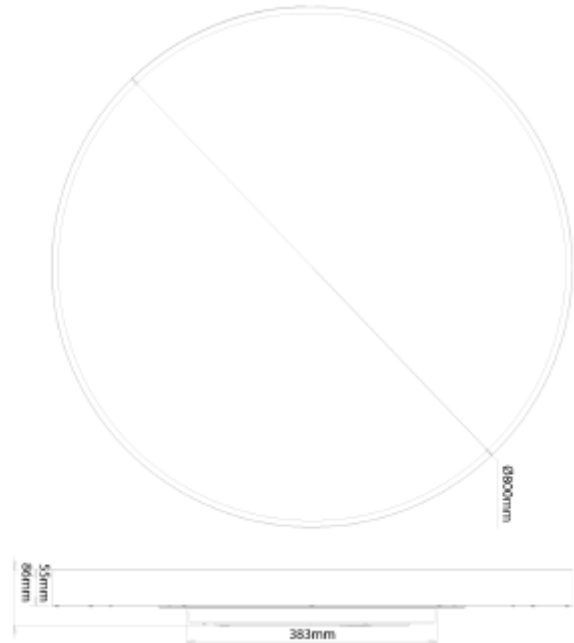

Galactic C



Art. no: 9077-02-3-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 7121 |
| Lumen LED (tc=25): | 7800 |
| Beam Angle: | 120° |
| CCT (Color Temperature): | 2700-3000K |
| CRI / Ra: | 80 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Micropris. |

MOUNTING / CONNECTION

| | |
|---------------|------------------------------------|
| Connection: | QuickConnect |
| Cut-out [mm]: | Ø385-Ø415 |
| Mounting: | Partial-recessed, Surface, Pendant |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | DALI2 |
| System Power [W]: | 80 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 15 |
| Max load pr circuit - B16: | 24 |
| Max load pr circuit - C10: | 24 |
| Max load pr circuit - C16: | 40 |
| Inrush current I _{max} [A]: | 25 |
| Inrush current time [µs]: | 280 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 550 |



FDV SPEC SHEET

Galactic C

Art. no: 9077-02-3-ddd



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP40 |
| Operating Temperature [°C]: | -20 - 45 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| RAL: | RAL9016 |
| Height [mm]: | 86 |
| Width [mm]: | 800 |
| Weight [kg]: | 11 |
| Housing Material : | Aluminium |