





## FDV SPEC SHEET


Pollux Square

Art. no: 2115-120-3

**Ledpro**  
by NORLUX

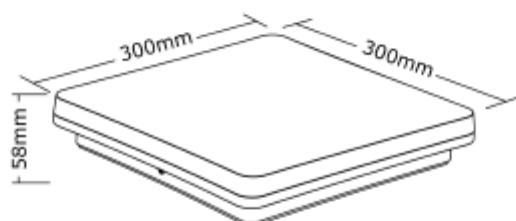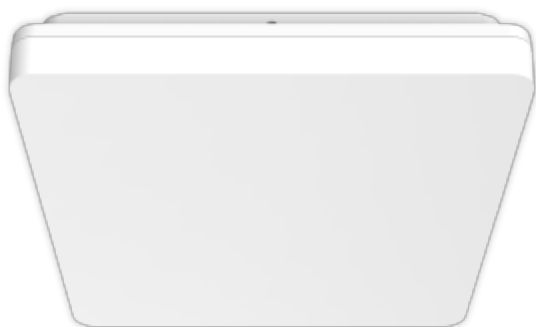

# Pollux Square



Art. no: 2115-120-3

### LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	1784 (4000K)
Lumen LED (tc=25):	2000
Spredningsvinkel [°]:	120
Fargetemperatur [K]:	3/4/5700
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830/840/857
Fargetoleranse [SDCM]:	3
Optikk:	Opal

### MONTERING / TILKOBLING

Tilkobling:	Hurtigkobling
Montering:	Utenpåliggende, Tak

### ELEKTRISK DATA

Dimmetype:	Ingen
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
Systemeffekt [W]:	18
Spenning [V]:	230V 50Hz
Isolasjonsklasse:	2
Maks belastning pr kurs - B10:	37
Maks belastning pr kurs - B16:	59
Maks belastning pr kurs - C10:	37
Maks belastning pr kurs - C16:	59
Lekkasjestrøm [mA]:	0,75
Startstrøm I <sub>max</sub> [A]:	19,6
Startstrøm tid [µs]:	12
Sokkel :	N/A



## FDV SPEC SHEET

Pollux Square

Art. no: 2115-120-3



### PRODUKT

IP-grad:	IP54
Vandal klasse:	IK10
Forventet Levetid :	L80B50: 50 000
Farge :	Hvit
Lengde [mm]:	300
Høyde [mm]:	58
Bredde [mm]:	300