


Silindir 70



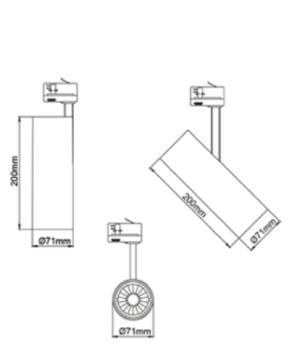

NORLUX

Lighting Solutions

The Silindir uses the possibilities created by new technology. The LED driver is mounted inside the luminare body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis.



SPECIFICATIONS

LED (built in)
19W
2700К
90
30°
Clear
DALI
Yes
230V 50Hz
Track 3-Circuit+dim
Track, Ceiling
L80B10: 100 000h
3
White
71mm
215mm
71mm
1kg