




FDV SPEC SHEET

Rod Midi C


Art. no: 102310-20-2



Lighting Solutions

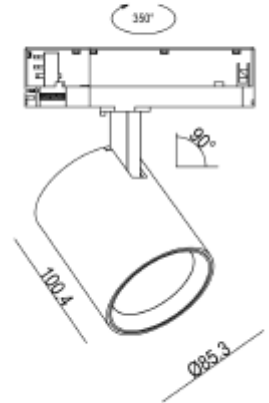

Rod Midi C



Art. no: 102310-20-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3000
Lumen LED (tc=25):	4100
Beam Angle:	20°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling

ELECTRICAL DATA

Dimming:	None
Flickerfree:	Yes
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	23
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	25
Max load pr circuit - B16:	40
Max load pr circuit - C10:	42
Max load pr circuit - C16:	66
Leakage current [mA]:	0,25
Inrush current I _{max} [A]:	12
Inrush current time [µs]:	2,8
Socket / Cap-Base:	N/A
Current Output [mA]:	600mA



FDV SPEC SHEET

Rod Midi C

Art. no: 102310-20-2



Lighting Solutions

PRODUCT

Ingress Protection:	IP20
Operating Temperature [°C]:	0 - 35
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9005
Height [mm]:	101
Diameter [mm]:	86
Weight [kg]:	0,63
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Polycarbonate