




FDV SPEC SHEET


Trimo

Art. no: 18045-7-60-3-ddd



Lighting Solutions

 155mm

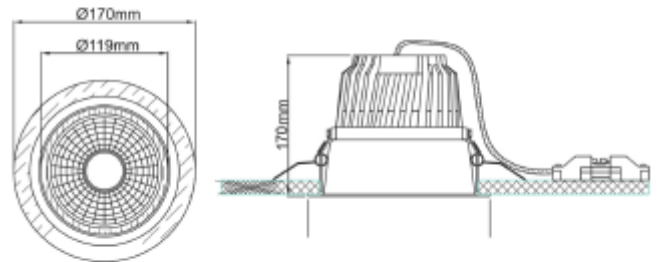

Trimo



Art. no: 18045-7-60-3-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3580
Lumen LED (tc=25):	4750
Beam Angle:	60°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	18i5 DALI Quick connection
Cut-out [mm]:	Ø155
Mounting:	Recessed, Ceiling

ELECTRICAL DATA

Dimming:	DALI
Dimming Output Type:	Amplitude Modulation
Standby power P _{sb} (W) <:	0,15
Flicker metric (P _{st} LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	31
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	14
Max load pr circuit - B16:	23
Max load pr circuit - C10:	23
Max load pr circuit - C16:	38
Leakage current [mA]:	0,16
Inrush current I _{max} [A]:	23
Inrush current time [µs]:	200
Socket / Cap-Base:	N/A
Current Output [mA]:	800



FDV SPEC SHEET

Trimo

Art. no: 18045-7-60-3-ddd



Lighting Solutions

PRODUCT

To be recessed in insulation:	No
Ingress Protection:	IP20
Lifetime [h]:	L80B10: 60 000
Color:	White
Length [mm]:	170
Height [mm]:	170
Width [mm]:	170
Weight [kg]:	1,4