




FDV SPEC SHEET

Ray Maxi

Art. no: 19142-7-30-3

NORLUX®

Lighting Solutions

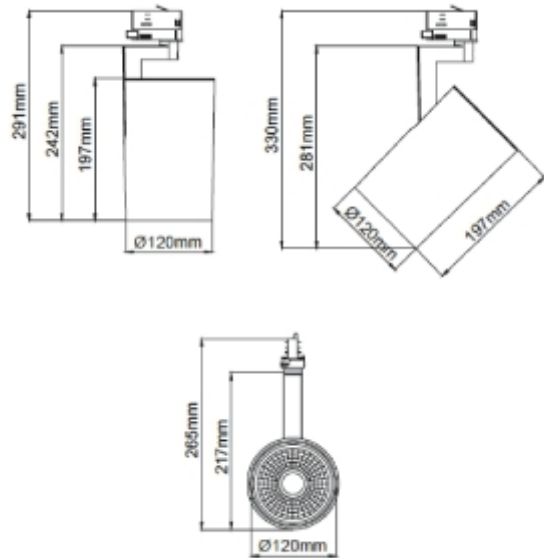

Ray Maxi



Art. no: 19142-7-30-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	6000
Beam Angle:	30°
CCT (Color Temperature):	3500
CRI / Ra:	80
Color Code:	835
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Ceiling

PRODUCT

Ingress Protection:	IP20
Color:	White
Height [mm]:	281
Width [mm]:	120
Housing Material :	Aluminium

ELECTRICAL DATA

Dimming:	None
System Power [W]:	39
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	8
Max load pr circuit - B16:	16
Max load pr circuit - C10:	16
Max load pr circuit - C16:	32
Leakage current [mA]:	0,45
Inrush current I _{max} [A]:	25
Inrush current time [µs]:	250
Socket / Cap-Base:	N/A
Current Output [mA]:	1000
Voltage Forward Min [V]:	32
Voltage Forward Max [V]:	36,7