




FDV SPEC SHEET

Cylinder 45

Art. no: 102190-36-3-p

Ledpro
by NORLUX

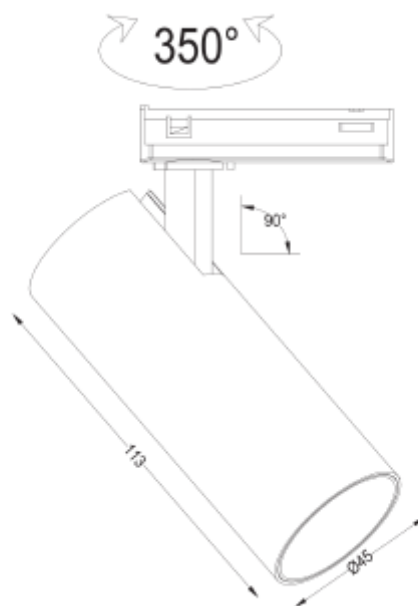

Cylinder 45



Art. no: 102190-36-3-p

LYS TEKNISK

| | |
|----------------------------|------------------|
| Lyskilde: | LED (innebygget) |
| Lumen ut (lm): | 740 |
| Lumen LED (tc=25): | 1100 |
| Spredningsvinkel [°]: | 36° |
| Fargetemperatur [K]: | 2700 |
| Fargegjengivelse [CRI/Ra]: | 90 |
| Fargekode: | 927 |
| Fargetoleranse [SDCM]: | 3 |
| Optikk: | Klar |
| UGR (<=): | 19 |

MONTERING / TILKOBLING

| | |
|-------------|------------------|
| Tilkobling: | Skinne 1-Tenning |
| Montering: | Skinne, Tak |



FDV SPEC SHEET

Cylinder 45

Art. no: 102190-36-3-p



| PRODUKT | | ELEKTRISK DATA | |
|------------------------|-----------------|------------------------------------|-------------------------|
| IP-grad: | IP20 | Dimmetype: | Faseavsnitt |
| Vandal klasse: | IK02 | Flimmerfri: | Ja |
| Driftstemperatur [°C]: | -20 - 45 | Standby power Psb (W) <: | 0,5 |
| Forventet Levetid : | L80B10: 100 000 | Flicker metric (Pst LM) <: | 1 |
| Farge : | Hvit | Stroboscopic effect metric (SVM) < | 0,4 |
| RAL: | RAL9010 | Systemeffekt [W]: | 8 |
| Lengde [mm]: | 110 | Spennings [V]: | 230V 50Hz |
| Høyde [mm]: | 110 | Dimming Output Type: | Amplitude Modulation |
| Diameter [mm]: | 45 | Dimming Phasecut Type: | Leading / Trailing edge |
| Vekt [kg]: | 0,22 | Isolasjonsklasse: | 1 |
| Hoved Materiale: | Aluminium | Maks belastning pr kurs - B10: | 75 |
| Diffusere Materiale: | Aluminium | Maks belastning pr kurs - B16: | 120 |
| Materiale 2: | Polycarbonate | Maks belastning pr kurs - C10: | 120 |
| | | Maks belastning pr kurs - C16: | 192 |
| | | Lekkasjestrøm [mA]: | 0,25 |
| | | Startstrøm I _{max} [A]: | 5 |
| | | Startstrøm tid [µs]: | 8 |
| | | Sokkel : | N/A |
| | | Strøm LED [mA]: | 180 |
| | | Spennings LED Min [V]: | 32 |
| | | Spennings LED Max [V]: | 36,2 |
| | | Nøddlys [t]: | Uten nøddlys |