




FDV SPEC SHEET

Proofsafe D

Art. no: 102973-120-3



Lighting Solutions

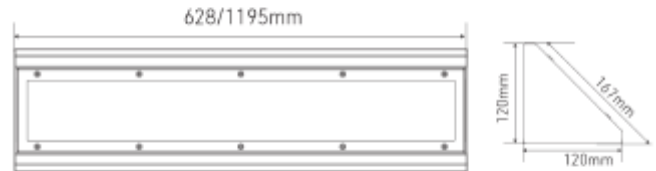

Proofsafe D



Art. no: 102973-120-3

| LIGHT TECHNICAL | |
|--------------------------|-------------------|
| Lightsource Type: | LED (replaceable) |
| Lumen Output: | 4320 |
| Lumen LED (tc=25): | 4700 |
| Beam Angle: | 105° |
| CCT (Color Temperature): | 3000 |
| CRI / Ra: | 80 |
| Color Code: | 830 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Opal |
| UGR (<=): | 25 |

| ELECTRICAL DATA | |
|--------------------------------------|-------------|
| Dimming: | None |
| Flickerfree: | Yes |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) < | 0,4 |
| System Power [W]: | 36/30/25/21 |
| Preset Power [W]: | 36 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 15 |
| Max load pr circuit - B16: | 24 |
| Max load pr circuit - C10: | 25 |
| Max load pr circuit - C16: | 40 |
| Leakage current [mA]: | 0,7 |
| Inrush current I _{max} [A]: | 18,1 |
| Inrush current time [µs]: | 226 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 35 |



FDV SPEC SHEET

Proofsafe D

Art. no: 102973-120-3



Lighting Solutions

| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP65 |
| Impact Protection: | IK10++ |
| Operating Temperature [°C]: | -20 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | White |
| RAL: | RAL9016 |
| Length [mm]: | 1195 |
| Height [mm]: | 120 |
| Width [mm]: | 120 |
| Weight [kg]: | 6,56 |

| MOUNTING / CONNECTION | |
|-----------------------|------------------------|
| Connection: | Quickconnectx2 |
| Mounting: | Surface, Wall, Ceiling |