




FDV SPEC SHEET

Linear

Art. no: 19042-02-2-ddd

Ledpro
by NORLUX

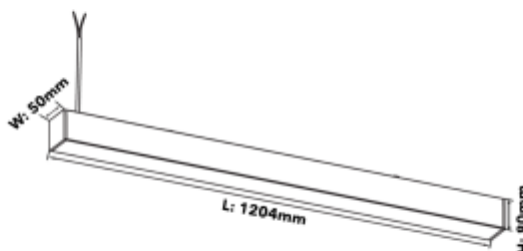

Linear



Art. no: 19042-02-2-ddd

LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	3050 (3500K)
Lumen LED (tc=25):	3400
Spredningsvinkel [°]:	110°
Fargetemperatur [K]:	30/35/4000K
Fargegjengivelse [CRI/Ra]:	90
Fargekode:	930/935/940
Optikk:	Opal

MONTERING / TILKOBLING

Tilkobling:	Skinne 3-Tenning
Montering:	Skinne, Tak

ELEKTRISK DATA

Dimmetype:	DALI2
Dimming Output Type:	Amplitude Modulation
Flimmerfri:	Ja
Systemeffekt [W]:	36
Spenning [V]:	230V 50Hz
Isolasjonsklasse:	2
Maks belastning pr kurs - B10:	35
Maks belastning pr kurs - B16:	56
Maks belastning pr kurs - C10:	35
Maks belastning pr kurs - C16:	56
Lekkasjestrøm [mA]:	0,7
Startstrøm I _{max} [A]:	7,6
Startstrøm tid [µs]:	186
Sokkel :	N/A



FDV SPEC SHEET

Linear

Art. no: 19042-02-2-ddd



PRODUKT

IP-grad:	IP40
Vandal klasse:	IK08
Farge :	Sort
Lengde [mm]:	1204
Høyde [mm]:	140
Bredde [mm]:	50
Vekt [kg]:	3,5