




PRODUCT SHEET

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Daylight 18i3
Art. no: 0385-NW-02-3



Lighting Solutions

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Da

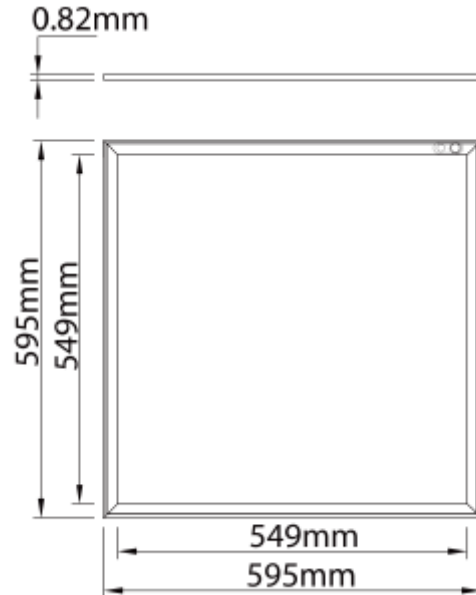

SPECIFICATIONS	
Lightsource Type:	LED (built in)
System Power [W]:	40WW
Preset Power [W]:	40WW
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	4800lm
Lumen LED (tc=25):	5100lm
Beam Angle:	120
Lens (Diffuser):	Micropris.
Dimming:	PWM, 1-10V
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Cable
Mounting:	Recessed, Ceiling
Cut-out [mm]:	595*595mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	120lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Color:	White
Length [mm]:	595mm
Height [mm]:	595mm
Width [mm]:	8mm

LED Panel is a luminaire for indoor use. With Norlux Wireless Connect integrated into the luminaire, you have modern lighting control technology without the need for additional cabling. It is designed for installation in system ceilings, suspended by a wire system, or with a mounting frame so the panel can be mounted on ceiling surfaces.