



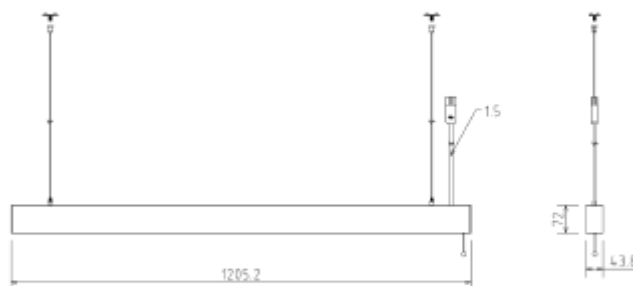

FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3730-NW-110-2

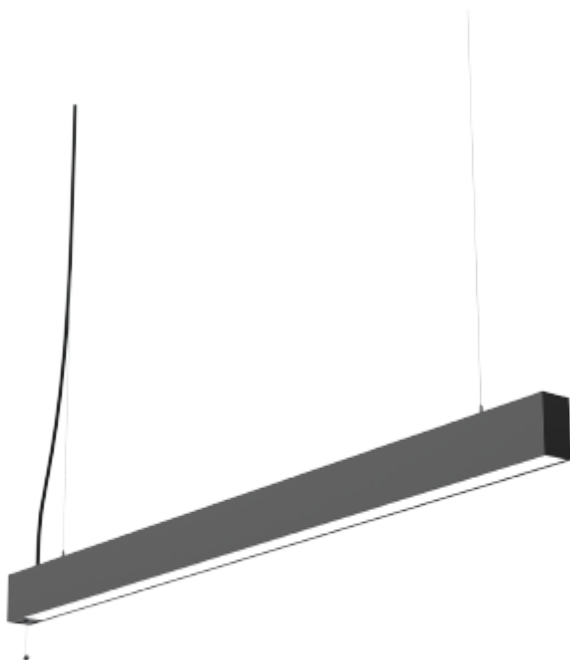

Benu Office Pullswitch



Art. no: 3730-NW-110-2

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen LED (tc=25):	5600
Beam Angle:	110° / 80°
CCT (Color Temperature):	3000K/4000K
CRI / Ra:	90
Color Code:	930/940
Lens (Diffuser):	Micropris.

MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Mounting:	Suspended, Ceiling, Pendant

PRODUCT

Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80B10: 100 000
Color:	Black

ELECTRICAL DATA

Dimming:	Norlux Wireless Connect
Flickerfree:	Yes
System Power [W]:	50
System Voltage [V]:	230V 50Hz
Protection Class:	1
Socket / Cap-Base:	N/A