




FDV SPEC SHEET

Cuna

Art. no: 102966-E-120-1-ddd

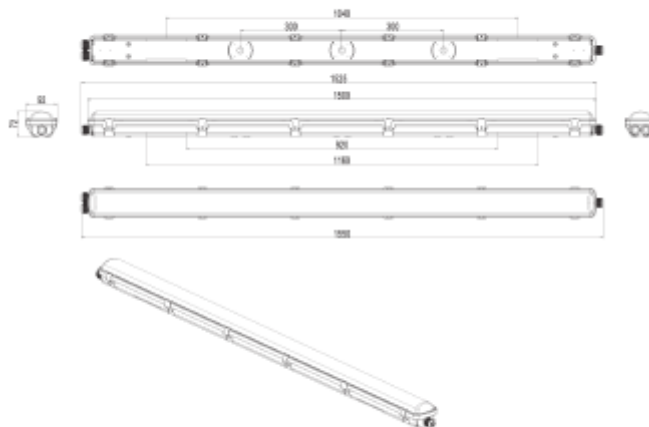

Cuna



Art. no: 102966-E-120-1-dd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	10400
Lumen LED (tc=25):	11400
Beam Angle:	120
CCT (Color Temperature):	30/35/4000K
CRI / Ra:	80
Color Code:	830/835/840
MacAdam (SDCM):	3
Lens (Diffuser):	PMMA Prismatic
UGR (<=):	25



FDV SPEC SHEET

Cuna

Art. no: 102966-E-120-1-ddd



PRODUCT		ELECTRICAL DATA	
Ingress Protection:	IP66	Dimming:	DALI2
Impact Protection:	IK03	Flickerfree:	Yes
Operating Temperature [°C]:	-20 - 40	Standby power Psb (W) <:	0,5
Lifetime [h]:	L80B10: 100 000	Flicker metric (Pst LM) <:	1
Color:	Light Grey	Stroboscopic effect metric (SVM) <	0,4
Length [mm]:	1550	System Power [W]:	65
Height [mm]:	72	Preset Power [W]:	65
Width [mm]:	92	System Voltage [V]:	230V 50Hz
Weight [kg]:	2,92	Protection Class:	1
		Max load pr circuit - B10:	13
		Max load pr circuit - B16:	21
		Max load pr circuit - C10:	22
		Max load pr circuit - C16:	35
		Inrush current Imax [A]:	17,81
		Inrush current time [µs]:	288
		Socket / Cap-Base:	N/A
		Current Output [mA]:	70
		Emergency light [h]:	3 hours
		Emergency light testing:	Selftest
		Emergency lumen out [lm]:	300
MOUNTING / CONNECTION			
		Connection:	Terminal
		Through-wiring (mm2):	5x2,5
		Mounting:	Surface, Suspended, Wall, Ceiling