




## FDV SPEC SHEET

C Line Base

Art. no: 102511-00-1

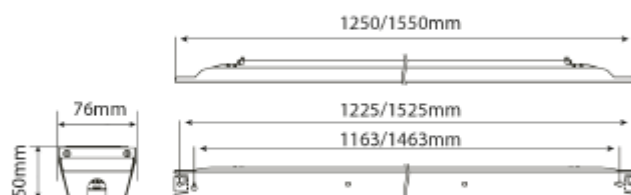

## C Line Base



Art. no: 102511-00-1

LIGHT TECHNICAL		ELECTRICAL DATA	
Lightsource Type:	LED (replaceable)	Dimming:	None
Lumen Output:	9900	Output Hz:	80000
Lumen LED (tc=25):	11000	Flickerfree:	Yes
Beam Angle:	60°	Standby power Psb (W) <:	50
CCT (Color Temperature):	3000	Flicker metric (Pst LM) <:	0,0285
CRI / Ra:	80	Stroboscopic effect metric (SVM) <	0,004
Color Code:	830	System Power [W]:	60/50/42/33
MacAdam (SDCM):	3	System Voltage [V]:	230V 50Hz
Lens (Diffuser):	Clear	Protection Class:	1
		Max load pr circuit - B10:	11
		Max load pr circuit - B16:	18
		Max load pr circuit - C10:	18
		Max load pr circuit - C16:	29
		Inrush current Imax [A]:	23
		Inrush current time [µs]:	242
		Current Output [mA]:	70



## FDV SPEC SHEET

C Line Base

Art. no: 102511-00-1



PRODUCT	
Ingress Protection:	IP23
Impact Protection:	IK10
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80: 100 000
Color:	Steel
Length [mm]:	1250
Height [mm]:	50
Width [mm]:	76
Weight [kg]:	2,04

MOUNTING / CONNECTION	
Connection:	QuickConnect
Mounting:	Surface, Ceiling