




## FDV SPEC SHEET

Tania Mini 3-Circuit

Art. no: 3551-2-25-3-ddd

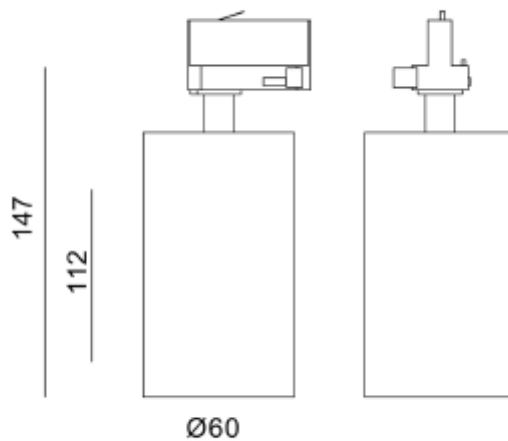

# Tania Mini 3-Circuit



Art. no: 3551-2-25-3-ddd

### LIGHT TECHNICAL

|                          |                |
|--------------------------|----------------|
| Lightsource Type:        | LED (built in) |
| Lumen Output:            | 1050           |
| Lumen LED (tc=25):       | 1450           |
| Beam Angle:              | 25             |
| CCT (Color Temperature): | 2700           |
| CRI / Ra:                | 90             |
| Color Code:              | 927            |
| MacAdam (SDCM):          | 3              |
| Lens (Diffuser):         | Clear          |

### MOUNTING / CONNECTION

|             |                     |
|-------------|---------------------|
| Connection: | Track 3-Circuit+dim |
| Mounting:   | Track, Ceiling      |

### PRODUCT

|                             |                |
|-----------------------------|----------------|
| Ingress Protection:         | IP20           |
| Operating Temperature [°C]: | -20 - 40       |
| Lifetime [h]:               | L80B10: 55 000 |
| Color:                      | White          |
| Length [mm]:                | 167            |
| Diameter [mm]:              | 60             |
| Weight [kg]:                | 0,5            |

### ELECTRICAL DATA

|                                      |                      |
|--------------------------------------|----------------------|
| Dimming:                             | DALI2                |
| System Power [W]:                    | 14,5                 |
| System Voltage [V]:                  | 230V 50Hz            |
| Dimming Output Type:                 | Amplitude Modulation |
| Protection Class:                    | 1                    |
| Max load pr circuit - B10:           | 38                   |
| Max load pr circuit - B16:           | 61                   |
| Max load pr circuit - C10:           | 38                   |
| Max load pr circuit - C16:           | 61                   |
| Inrush current I <sub>max</sub> [A]: | 52                   |
| Inrush current time [μs]:            | 1                    |
| Current Output [mA]:                 | 350                  |